




NOTES:

1. FOR CLARITY NOT ALL PIPING IS SHOWN.
2. * INDICATES STANDARD RECEIVER SIZE.
3. 15 HP WITH 200 GALLON TANK SHOWN.
4. BASE-FRAMES ARE SHIPPED TOGETHER AND CAN BE UNBOLTED FOR PASSAGE THROUGH A STANDARD DOOR-WAY
5. NO VIBRATION PADS ARE REQUIRED, PROVIDED THAT ALL BOLT-DOWNS ARE USED.
6. ALL ACCESSORIES, PIPE AND FITTINGS BEYOND INLET AND DISCHARGE PORTS ARE SUPPLIED AND INSTALLED BY OTHERS
7. ALLOW 36 INCHES IN FRONT OF CONTROL PANEL FOR MAINTENANCE AND VENTILATION, ALL OTHER SIDES REQUIRE 24 INCHES OF CLEARANCE.

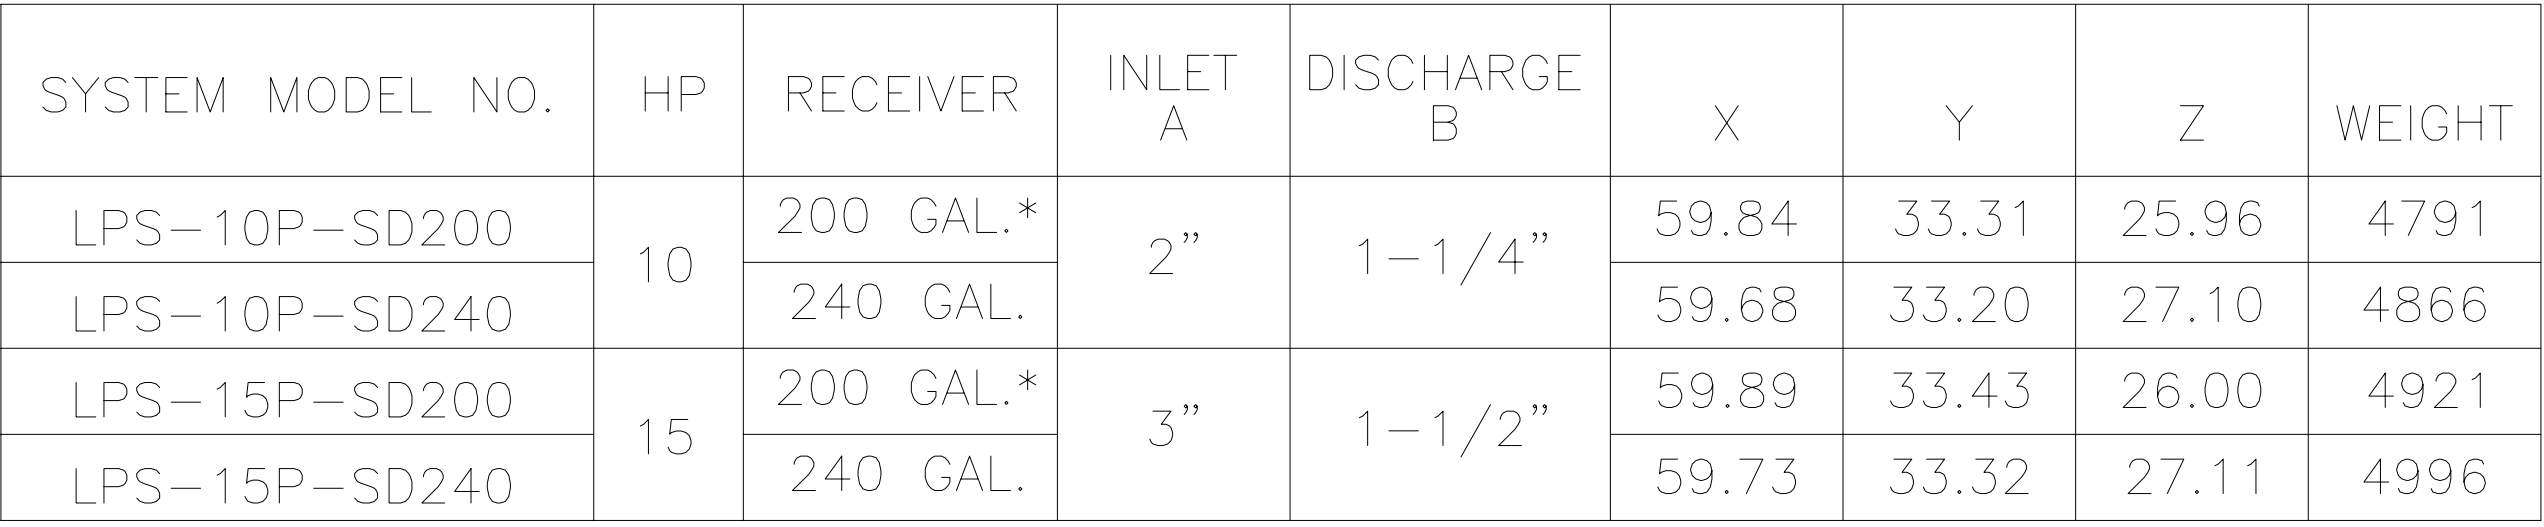